


GF-C40B insert car fuse holder

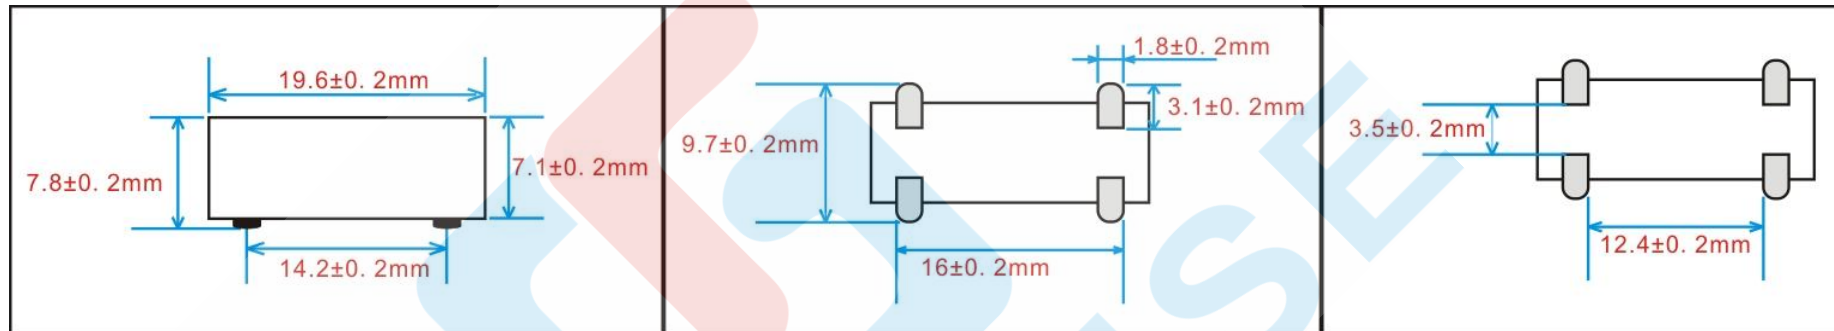

Product introduction

1. material: Contacts-brass, $T=0.4$ mm
Insulator-Glass Filled PBT, Base:UL-94V0
2. (medium)(small)(MINI)(extra small)
Three in one universal fuse plug holder
3. Suitable rated current:30A@500V AC
4. Insertion and extraction force:1Kg min
5. Dielectric Strength :Min AC 1000V
6. Contact Resistance:Max 50mΩ
7. Temperature rise:50° Max
8. Insulation Resistance At 500V DC:100MΩ

Attention:Product size changes are not notified

The company has obtained the quality system certification of IATF16949:2016 automobile industry.
The product has obtained UL CE CQC TUV REACH and many international certification.